SCAN SØRLIE-

SIZE



Table of contents

General	2
Care instructions	3
Installation instructions	4-9



Congratulations on your purchase of a Scan Sørlie product!

In order to maximise the service life and to get the best quality, it is important to follow the installation instructions. Scan Sørlie disclaims all liability and warranty for damage caused by improper use or handling of the product that does not comply with the instructions in this manual.

For warranty conditions, see our website. For questions please contact us.



Textile Range

Vacuum with a suitable nozzle, not without a nozzle. For heavy soiling, use a mild furniture cleaner. Check the textile manufacturer's website for approved types of cleaners.

Metal Range

Wipe with a dry or damp cloth. For heavy soiling, use a mild detergent such as dish soap or mild soap. Avoid abrasive cleaners and other products containing abrasives, acids, or ammonia.

Wood and Laminate

To take care of your furniture in the best way, you should use ordinary cleaning agents for the painted surfaces. Avoid agents containing abrasives, acids or ammonia. On other surfaces that may be more porous, it is best to clean with a slightly damp cloth and the same mild detergent. Here too, you should not use scouring powder or agents that contain abrasives, acids or ammonia.

Plastic

Wipe with a dry or damp cloth. For heavy soiling, use a mild cleaning agent such as washing-up liquid or soap.

Chairs must be used in accordance with their intended purpose and with due care. Using a chair in any way other than prescribed (standing, sitting on armrests etc.) poses a risk and may end in an accident.

Furniute pads are suitable for both hard and soft floors. The chairs are developed for use in public/office environments.

Maximum load is 110 kg.


- Furniture should be protected from direct sunbeam
- Leather furniture should not be placed close to any heating.
- Minimal distance from source of heat is 30 cm.
- Avoid humidity
- Protect the upholstery against fat, sweat, grease, etc. If dirty, use appropriate cleaners.
- Products should be vacuumed at least once a year
- Hard castors are dedicated for soft floors (carpets)
- Soft castors are dedicated for hard floors (panels, PVC, parquets)
- It is necessary to follow the conditions below of use of the products with wood/plywood elements:
- temperature range +15 ÷ 30 °C,
- moisture range 40 \div 65%,
- Please pay attention to avoid of scratching the surface of wooden elements by desks or other office elements.
- Any mechanical damages are not considered as product defects.


SERVICE AND GUARANTEE NOTE:


Only specialized personnel should perform all repairs connected with the exchange of mechanical parts.



INSTALLATION INSTRUCTIONS

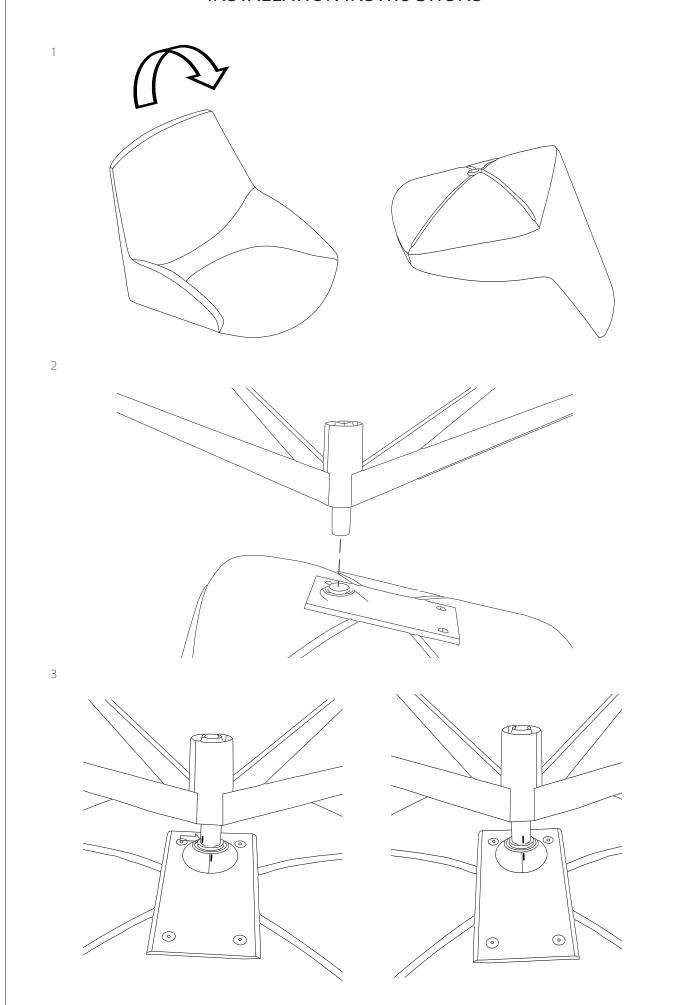

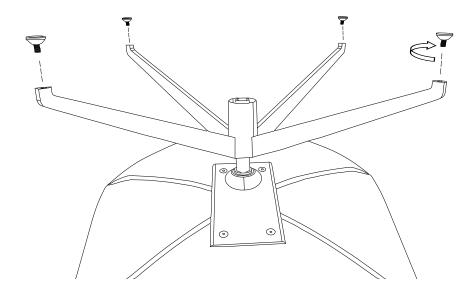

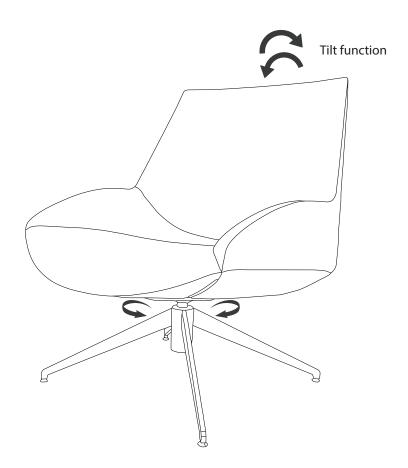

Auto return makes chair face forward after use.

